



OPS530 NEW

Open Pluggable Specification (OPS) Digital Signage Player with 12th Gen Intel® Core™ i7/i5 Processor, Intel® Iris® Xe Graphics with 4K60Hz, and TPM 2.0

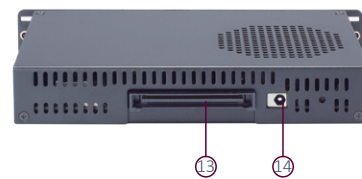

- | | | |
|---------------------|------------------------------|---------------------------|
| 1. USB Type-C | 6. LAN | 11. USB 3.2 Gen1 |
| 2. Audio line-out | 7. USB 3.2 Gen2 | 12. Optional antenna |
| 3. Microphone | 8. Storage & Power indicator | 13. JAE TX-25A |
| 4. HDMI 1.4b | 9. Power button | 14. 12/19V DC power input |
| 5. 2 x USB 3.2 Gen2 | 10. Optional antenna | |

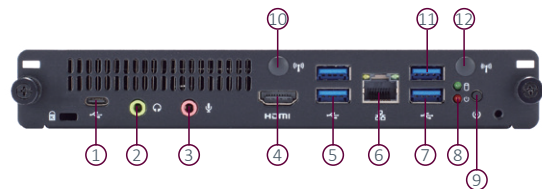

Features

- Intel® Open Pluggable Specification (OPS compliance)
- 12th gen Intel® Core™ i7/i5 processor (Alder Lake-P/U series)
- 2 DDR4-3200 SO-DIMM
- 1 M.2 Key M 2280 for SATA/NVMe storage
- 1 M.2 Key E 2230 for Wi-Fi/Bluetooth solution
- Supports USB 3.2 Gen2
- Supports Intel vPro® platform (optional)
- Supports TPM 2.0 (optional)
- Easy installation and maintenance

Specifications

CPU	12th gen Intel® Core™ i7/i5 processor (Alder Lake-P/U series)
Chipset	SoC integrated
System Memory	2 x DDR4-3200 SO-DIMM
Storage	1 x M.2 Key M 2280 (supporting PCIe x4 and SATA signals), with automatic SATA/NVMe switch
Watchdog Timer	255 levels, 60 to 255 sec./min.
TPM	TPM 2.0 (optional)



Specifications

I/O	3 x USB 3.2 Gen 2 1 x USB 3.2 Gen 1 1 x USB Type-C 1 x 10/100/1000 Mbps Ethernet (RJ-45) 1 x HDMI 1.4b supporting 4K @ 30Hz 1 x Line-out (3.5 mm) 1 x Mic-in (3.5 mm) 2 x antenna opening 1 x power button 1 x power LED 1 x HDD LED
JA6 TX-25A	1 x HDMI 2.0a supporting 4K @ 60Hz 1 x DisplayPort 1.2 supporting 4K @ 60Hz 2 x USB 2.0 1 x USB 3.2 Gen 1 1 x audio (Line-out) 1 x UART (TX/RX)
Indicator	1 x LED for system power on 1 x LED for storage activity
Expansion Interface	1 x M.2 Key E 2230 for Wi-Fi
Dimensions (W x D x H)	200 x 119 x 30 mm (7.87" x 4.68" x 1.18")
Weight (net/gross)	1 kg (2.21 lb)/1.5 kg (3.3 lb)
Operating Temperature	0°C to +45°C (+32°F to +113°F)
Certifications	CE, FCC Class B
Country of Origin	China

Ordering Information

Standard

OPS530-I5-WTPM 1240P	OPS digital signage player with Intel® Core™ i5-1240P processor (28W), 2 SO-DIMM, 1 M.2 SSD, 1 HDMI, 1 LAN, 1 USB Type-C, 3 USB 3.2 Gen 2, 1 USB 3.2 Gen 1, featuring vPro and TPM *MOQ: 300pcs (made in China)
OPS530-I7-WTPM 1260P	OPS digital signage player with Intel® Core™ i7-1260P processor (28W), 2 SO-DIMM, 1 M.2 SSD, 1 HDMI, 1 LAN, 1 USB Type-C, 3 USB 3.2 Gen 2, 1 USB 3.2 Gen 1, featuring vPro and TPM *MOQ: 300pcs (made in China)
OPS530-I5-WTPM 1235U	OPS digital signage player with Intel® Core™ i5-1235U processor (15W), 2 SO-DIMM, 1 M.2 SSD, 1 HDMI, 1 LAN, 1 USB Type-C, 3 USB 3.2 Gen 2, 1 USB 3.2 Gen 1, featuring vPro and TPM *MOQ: 300pcs (made in China)
OPS530-I7-WTPM 1255U	OPS digital signage player with Intel® Core™ i7-1255U processor (15W), 2 SO-DIMM, 1 M.2 SSD, 1 HDMI, 1 LAN, 1 USB Type-C, 3 USB 3.2 Gen 2, 1 USB 3.2 Gen 1, featuring vPro and TPM *MOQ: 300pcs (made in China)

Packing List

Quick installation guide

Optional OS Installation

Windows® 10 64-bit, Windows®11 64-bit, and Linux

Dimensions

